

<b>TITLE</b> DC POWER JACK	<b>SPC. NO.</b> KM02016	<b>PAGE : 1 OF 6</b> <b>DATE : 2004.06.24</b>
-------------------------------	----------------------------	--

### 1. Scope

This specification applies to unified polarity type DC jack ( Type 1 ② 3 4 ) used in electronic equipment.


For DC input use.

### 2. Applicable Safety Standard /Applicable Standard

Applicable Safety Standard : Electrical Applicable and Material Control Law ( Technical Requirement )

Applicable Standard : EIAJ RC-5320 “Plugs and jacks for coupling an external voltage power supply ”  
( Unified polarity type )

### 3. Polarity



### 4. Standard atmospheric conditions

Unless otherwise specified. The standard range of atmospheric condition for making measurements and tests are as follows :

Ambient temperature: 5°C to 35°C

Relative humidity: 45% to 85%

Air pressure: 86kPa to 106kPa

If there is any doubt about the results, measurements shall be made within the follow limits:

Ambient temperature: 20±2°C

Relative humidity: 60% to 70%

Air pressure: 86kPa to 106kPa

ISSUE	DATE	WRTN	CHKD	APVD	DESCRIPTIONS
	2004.06.24	FUHAN	JOHNSON	ERIC	
Δx 2	2008.01.24	MIMO	JOHNSON	DICK	修正 Change Resistance to Soldering Heat Test · Solderability

<b>TITLE</b> DC POWER JACK	<b>SPC. NO.</b> KM02016	<b>PAGE : 2 OF 6</b> <b>DATE : 2004.06.24</b>
-------------------------------	----------------------------	--

## 5. Mechanical characteristics

	Item	Conditions	Specification
1	Insertion force	Measurement shall be made after insertion and withdrawal using standard plug gauge 3 times.	19.6N (2kgf MAX)
2	Withdrawal force		2.95~14.7 N (0.3~1.5kgf)
3	Terminal strength	A static load of 4.9N (500gf) shall be applied to the tip of the terminal for 10 sec in any direction.	There shall be no damage to the terminal such as cracks, Looseness or play. Electrical and mechanical characteristics shall be satisfied.

## 6. Electrical characteristics

	Item	Conditions	Specification
1	Rating	Type 1	<del>DC 3.15V 2A</del>
		Type 2	DC 6.3V 2A
		Type 3	<del>DC 10.5V 2A</del>
		Type 4	<del>DC 13.5V 2A</del>
2	Contact resistance	1K Hz Measured at small current (100mA or less)	30 mΩ MAX.
3	Insulation resistance	Apply a voltage of 500V DC for 1 min. to following portions after which measurement shall be made: Between body and conductor Between conductors not to be contact Between conductors not to be contact when plug is inserted	100MΩ MIN.
4	Dielectric strength	AC 500V (60Hz) For 1 min. Trip current : 2mA Between body and conductor Between conductors not to be contact Between conductors not to be contact when plug is inserted	Without damage such as insulation breakdown

## 7. Endurance characteristics

	Item	Conditions	Specification
1	Solderability △	Temperature of solder : 250°C ±5°C Time of dip : 3 ±0.5 seconds Length of dip : 2 ±0.5mm (from top of terminal)	The soldered area shall be covered a minimum of 90% of the surface being immersed.

<b>TITLE</b> DC POWER JACK	<b>SPC. NO.</b> KM02016	<b>PAGE : 3 OF 6</b> <b>DATE : 2004.06.24</b>
-------------------------------	----------------------------	--

Item	Conditions	Specification		
1	Wave soldering Process	Electrical and mechanical characteristics shall be satisfied, and not show remarkable failure.		
	Profile Feature		Pb-Free Assembly	
			Topside PCB	Padside PCB
	Preheat -Temperature min -Temperature max -Time (ts min to max)		120°C (Ts1 max)	110°C (Ts min) 150°C (Ts max) 75 sec
	Peak/Classification Temperature		165°C (Tp1)	260°C ±5°C (Tp)
	Time within 5°C of actual Temperature (tp)			10 sec (within 2 times every time 2-3 sec)
	Time 25°C to Peak temperature			3 minutes max
	Resistance to Soldering Heat Test △	Wave Soldering Temperature Profile are as below		
		<p>Temperature</p> <p>Time</p> <p>--- Topside PCB</p> <p>— Padside PCB</p>		
		Soldering Iron Test Temperature of soldering Iron : 380±10°C Soldering time : 3±1 seconds	Same as Wave soldering Process	
	Insertion force	19.6N (2kgf MAX)		
	Withdrawal force	2.95 ~ 14.7N (0.3 ~ 1.5kgf)		

<b>TITLE</b> DC POWER JACK	<b>SPC. NO.</b> KM02016	<b>PAGE : 4 OF 6</b> <b>DATE : 2004.06.24</b>
-------------------------------	----------------------------	--

Item	Conditions	Specification	
3 Cold	The jack shall be stored at a temperature of $-25^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 2 hours. And then it shall be subjected to the controlled recovery conditions for 1 hour after which measurement shall be made.	1. There shall be no damage on appearance. 2. Mechanical and electrical characteristics shall be satisfied.	
4 Dry heat	The jack shall be stored at a temperature of $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 96 hours. And then it shall be subjected to the controlled recovery conditions for 1 hour after which measurement shall be made.		
5 Composite temperature / humidity cyclic test	The jack shall be subject to 10 continuous cycles each as shown in figure below. Then the jack shall be stored at standard atmospheric conditions for 24 hours recovery after which measurement shall be made. ※Temperature shall be reduced from $25^{\circ}\text{C}$ to $-10^{\circ}\text{C}$ within 30 min. ※Humidity uncontrolled at a temperature less than $25^{\circ}\text{C}$		


TITLE		SPC. NO.	PAGE : 5 OF 6
DC POWER JACK		KM02016	DATE : 2004.06.24
Item	Conditions	Specification	
6	Sulfuration The terminals of miniature jack shall be dipped into a dilute solution of 3% potassium sulfide for 1 minute.	60 mΩ MAX.	
7	Operating endurance Without load : Insertion and withdrawal shall be made with the mating plugs and jacks for 5000 cycles at a speed of 10~20 cycles/min. Load : At rating condition ( non-inductive load ) Insertion and withdrawal shall be made 1000 cycles at a speed of 10~20 cycles/min.	Insertion force : 19.6N ( 2kgf ) MAX Withdrawal force : 1.96~14.7 N ( 0.2~1.5kgf ) Contact resistance : 60 mΩ MAX.	

<b>TITLE</b> DC POWER JACK	<b>SPC. NO.</b> KM02016	<b>PAGE :</b> 6 OF 6 <b>DATE :</b> 2004.06.24
-------------------------------	----------------------------	--

8. Mating plug

TYPE 2
$3.15V < RV \leq 6.3V$
RV=Rated voltage


Figure of mating plug

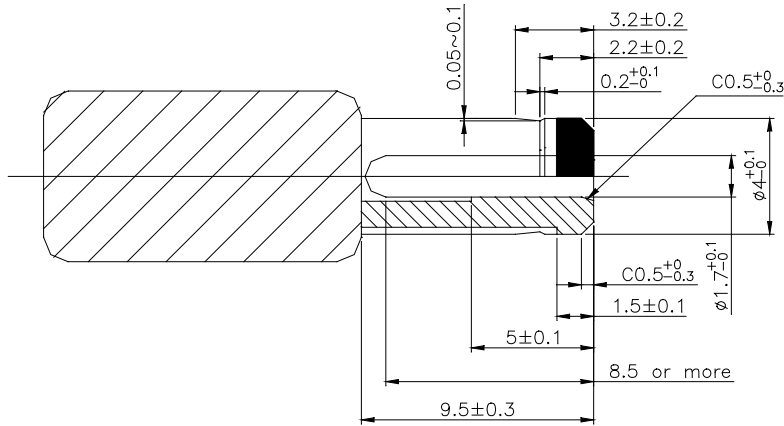

UNIT : mm

TYPE 3
$6.3V < RV \leq 10.5V$
RV=Rated voltage

Figure of mating plug

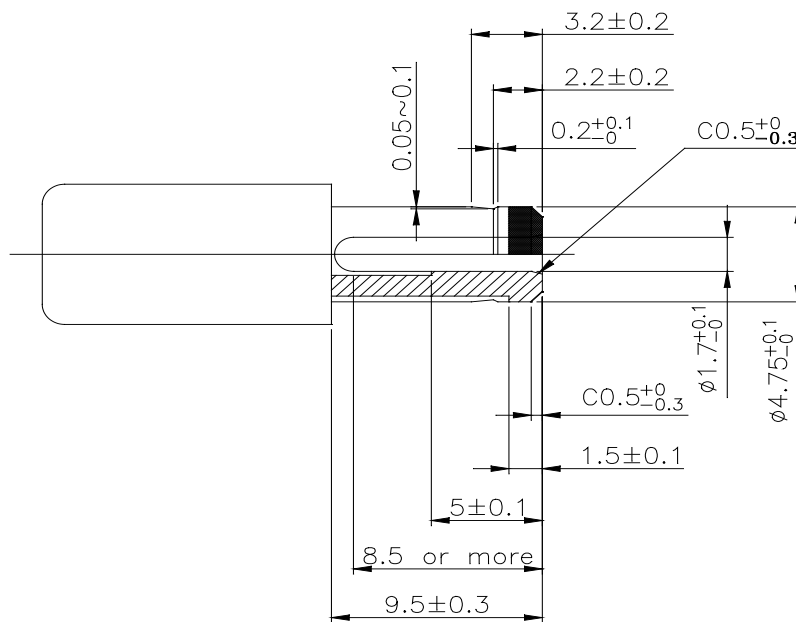

UNIT : mm