


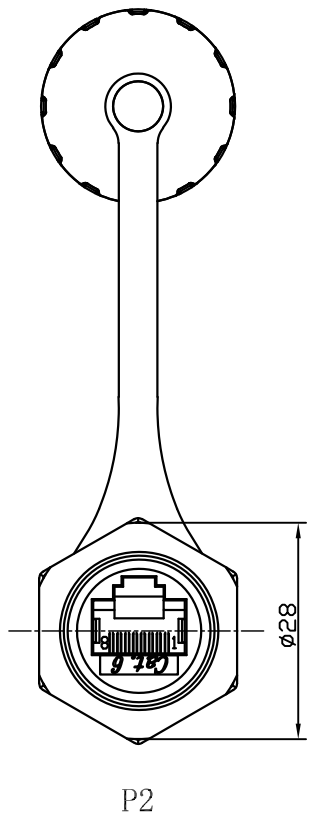
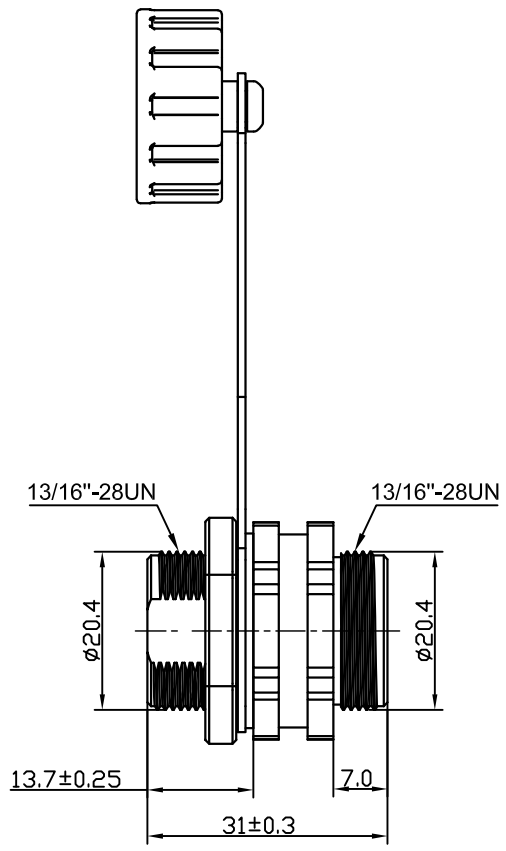


REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.

技术规格

1. 额定电流: 1.5A
额定电压: 50V
2. 电介质强度: DC 1000V
3. 接触电阻: ≤ 30 mΩ
4. 绝缘阻抗: ≥ 100 MΩ
5. 使用寿命, 以连接次数计: ≥500 次
6. 防水等级: IP67

WIRE DIAGRAM		
P1		P2
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
S	_____	S

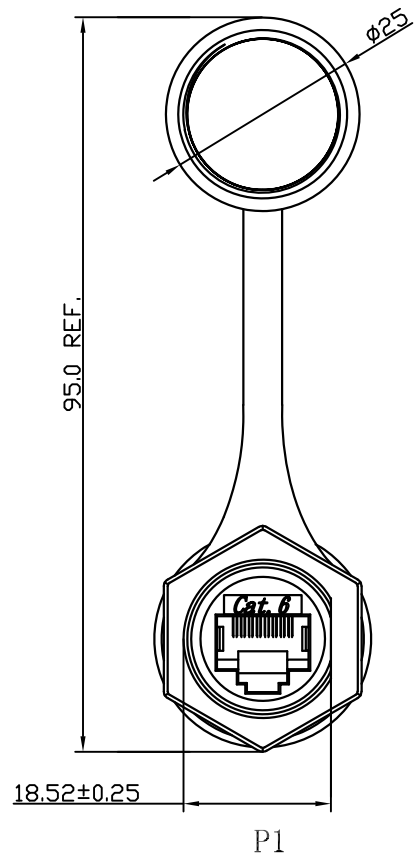

推荐安装开孔尺寸
面板最厚度: ≤3.5mm

NO.	PART NAME	QTY'	MATERIAL	REMARK
⑧	SUPPORT	1	PHOSPHOR BRONZE(8P8C)	Au-PLATED
⑦	WATERPROOF WASHER	1	SILICA GEL BLACK	
⑥	PROTECTIVE COVER	1	PA66 BLACK	
⑤	SILICONE SHEET	1	SILICA GEL BLACK	
④	EARTH TERMINAL	2	STAINLESS STEEL	NI-PLATED
③	SILICONE RING	1	SILICA GEL BLACK	
②	NUT	1	PA66 UL94V-0 BLACK	
①	HOUSING	1	PA66 UL94V-0 BLACK	

120~315	±0.55	DWN	王安盛	DATE	2018.07.18	SCALE 1/1	NAME M20 RJ45 CAT6
30~120	±0.45	DSND	王安盛	DATE	2018.07.18		
6~30	±0.35	CHKD	李阮龍	DATE	2018.07.18	PROJECTION ⊕ ↙	CAT. NO. KMTMPMWRJ1049
BELOW 6	±0.25	APVD	郭遠峰	DATE	2018.07.18		
DIMENSION	TOLERANCE	KUNMING ELECTRONICS CO.,LTD.				DWN.NO. A-TMPMWRJ1049	1/1
							001