

1	INITIAL RELEASE	JACK WU	2022/02/13
2	ECN Δ Δ Δ	RON LO	2024/07/17
3			

SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 25V AC
3. Contact Resistance: 60m Ω max.
4. Insulation Resistance: 500M Ω Min.
5. Dielectric Withstanding Voltage : 250VAC
6. Durability : 25 Cycle
7. Operating Temperature Range : -55°C~+85°C

NOTE 1 :

DATE CODE : YYWWDLX





1. YY : YEAR (21 : 2021)
2. WW : WEEK (25 : The 25th Week)
3. D : DAY (1~7 Sunday~Saturday)
4. L : Line Number of Assembly (A : Line A)
5. X : Manufaire Code

NOTE 2 :

P/N : CX4-DR580A-17 "X"


- X : Au Plated
- 1 : GF
- 2 : 10u"

4	LATCH	Stainless Steel
3	SOLDER PEG	Stainless Steel, Tin Plating Entire Over
2	TERMINAL	Phosphor Bronze, Gold Flash on Contact Area Gold Flash on Solder tail
1	HOUSING	LCP, UL94V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°
SCALE 1 : 1		DWN JACK WU 20220213
SHEET 1/4		CHK PETER WANG 20220213
SIZE A4		APVD SIMON LI 20220213
CUSTOMER DRAWING		PRODUCT No. KMCX4DR580A17X
		DRAWING No.
KUNMING ELECTRONICS CO.,LTD.		
NAME		
SO-DIMM DDR5, Horizontal, Standard Type, 0.5mm Pltch, 262Pin, 8.0H		

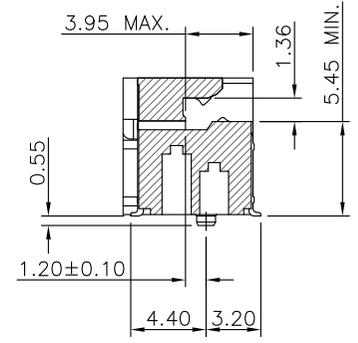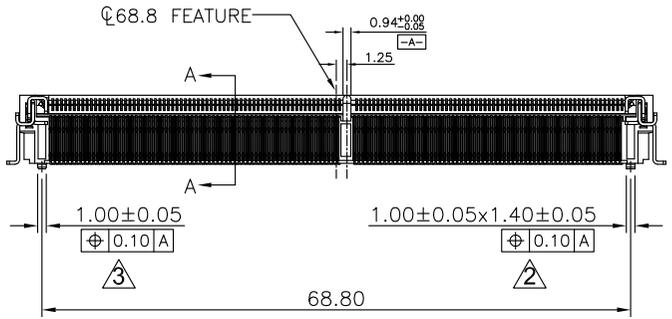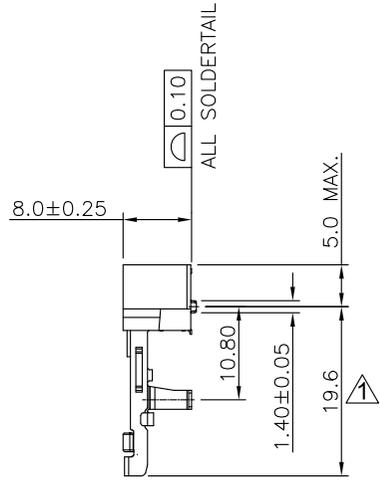
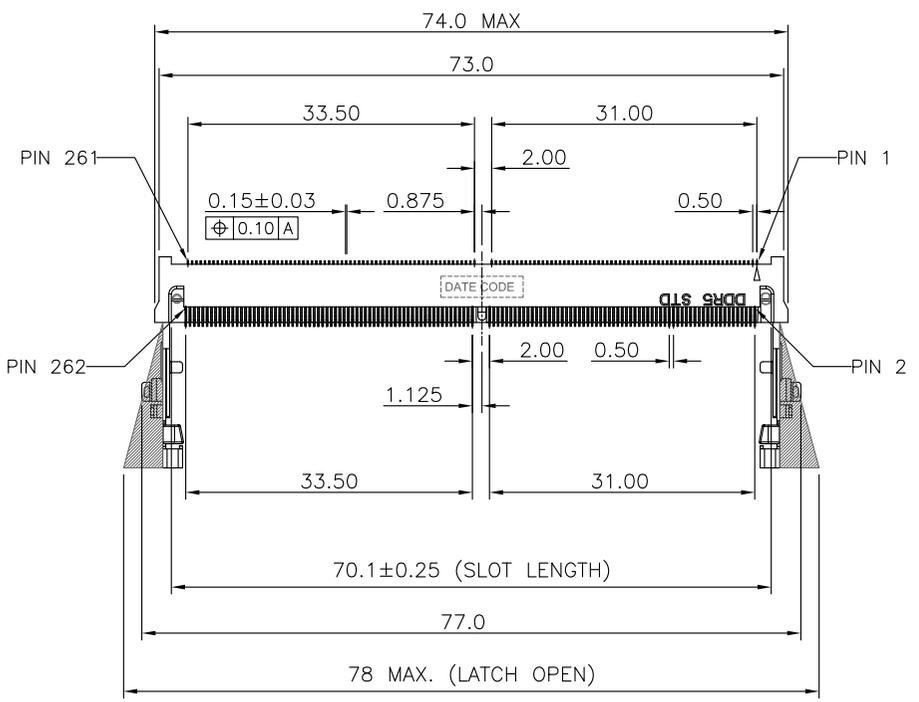


SECTION A-A
SCALE 2 : 1


1	INITIAL RELEASE	JACK WU	2022/02/13
2	ECN   	RON LO	2024/07/17
3			

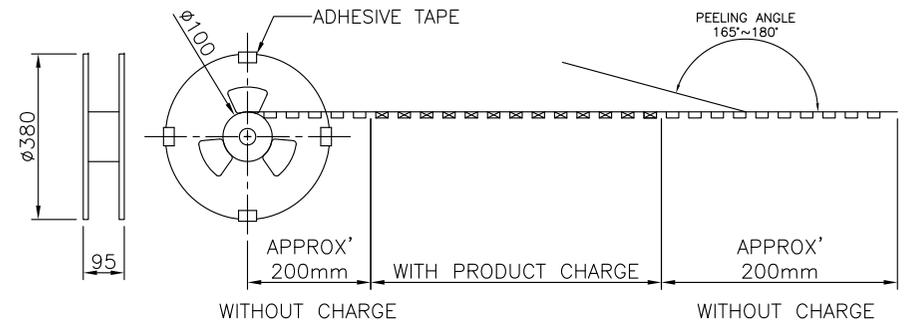



PULL OUT DIRECTION 

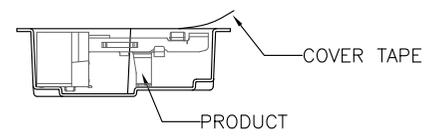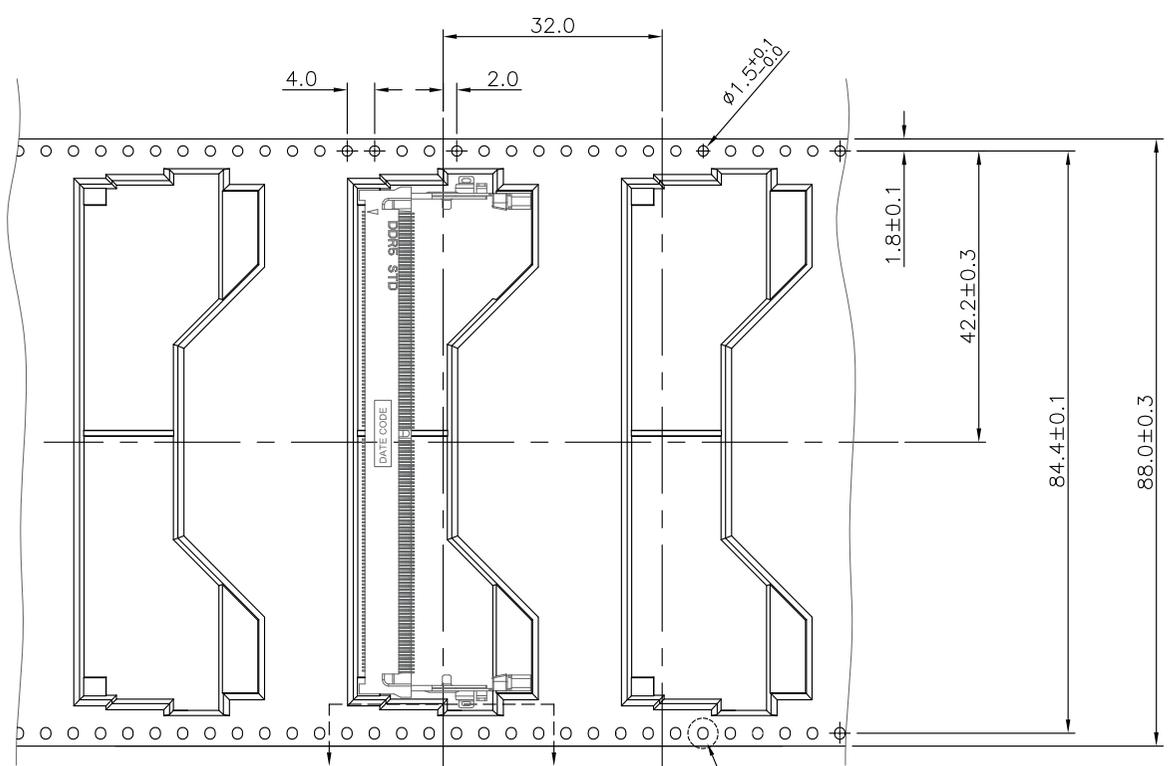

SECTION A-A



DETAIL : R
SCALE 4 : 1

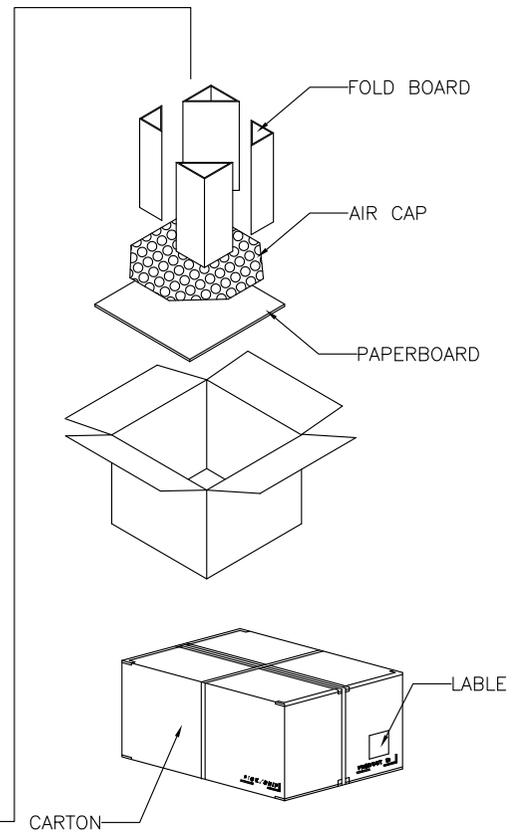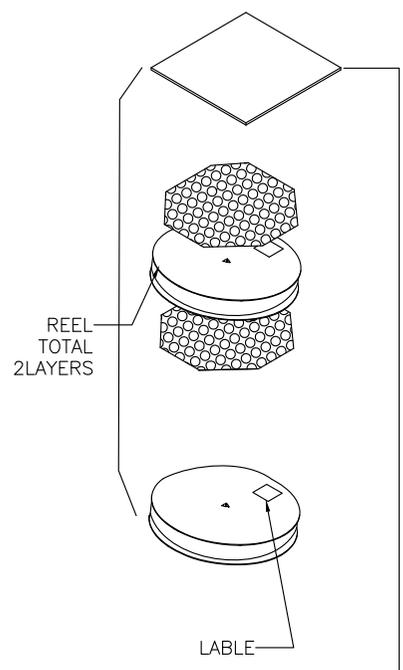

- PACKAGE :**
- 250 PCS / Reel
 - 2 Reel / Carton
 - 500 PCS / Carton

DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :		KUNMING ELECTRONICS CO.,LTD.	
		X.	± 0.30	NAME	
		X.X	± 0.20	SO-DIMM DDR5, Horizontal, Standard Type, 0.5mm Pltch, 262Pin, 8.0H	
SCALE	1 : 1	APVD	± 0.10	PRODUCT No.	
SHEET	4/4	CHK	± 3°	KMCX4DR580A17X	
SIZE	A4	APVD		DRAWING No.	
CUSTOMER DRAWING					