






REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.
△x1	To change the mark of housing (ECR C03150547)	2015.07.09	陳衛兵	張啟濤	陳宗碧
△x3	Cancel the CSA mark (CSA Reference No) ECR C03150547	2018.08.10	李阮龍	李阮龍	李阮龍





Section A-A


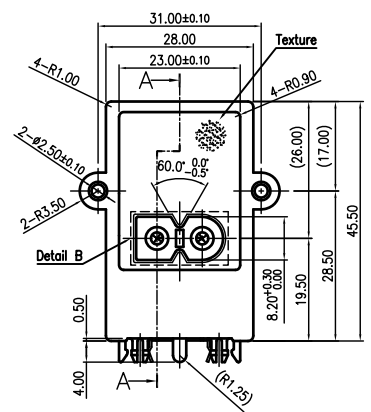


Detail A
Scale:2:1

Detail B
Scale:2:1

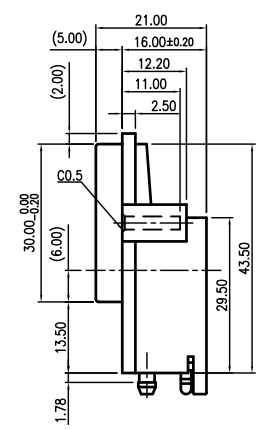

Detail C
Scale:2:1

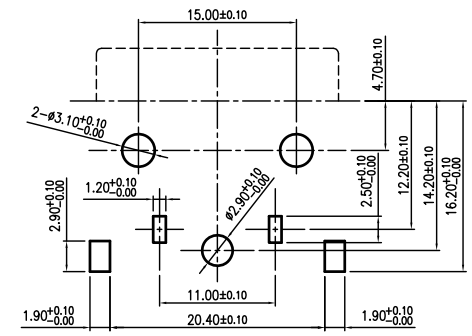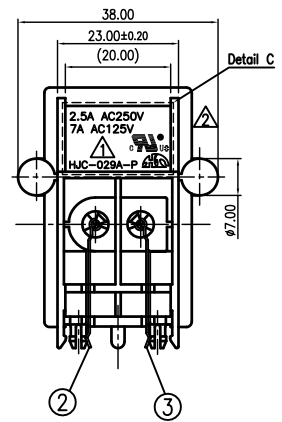

PCB Layout Dimension (Tolerance:±0.10)
(Recommend min. Dimension)(Bottom View)
Scale 2:1

Note: Approved Standard: UL&cUL FILE NO. : E95834

3	TERMINAL PIN-2	1	C2680	t=0.40	MBCu-Sn plated
2	TERMINAL PIN-1	1	C2680	t=0.40	MBCu-Sn plated
1	HOUSING	1	NORYL UL 94V-0		Black

LTR	PART NAME	Q'TY	MATERIAL	REMARK
120~315	±0.50	DWN	鄭伍豐	DATE 2008.06.26
30~120	±0.35	DSND	鄭伍豐	DATE 2008.06.26
6~30	±0.22	CHKD	李志堅/陸昌妹	DATE 2008.06.27
BELOW 6	±0.16	APVD	蔡志祿	DATE 2008.07.15
DIMENSION	TOLERANCE	KUNMING ELECTRONICS CO.,LTD.		
SCALE N/A				NAME AC POWER SOCKET
PROJECTION				CAT. NO. HJC-029A-P
UNIT:mm				DWN.NO. A-029A-P
				1/1
				C-001

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.30 ANGLES:±5°

The raw material specified by Sony should meet SS-00259 requirement of the latest version. When such material is used, it should be supplied by Sony designated suppliers.