





PCB Layout Dimension (Tolerance: ±0.1)
(Recommend min. Dimension) (bottom view)



PANEL HOLE

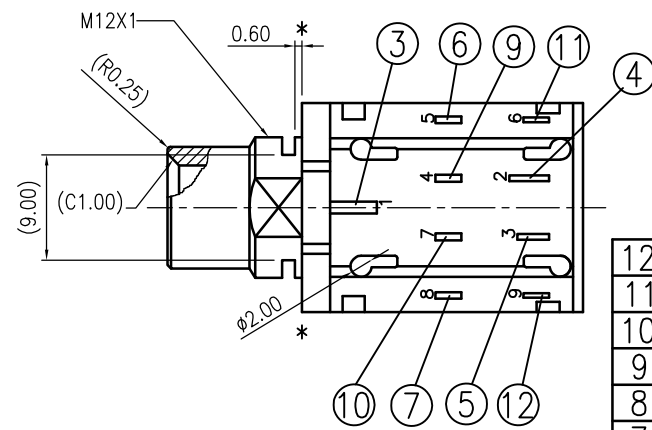

Detail A
Scale: 2:1



Schematic

REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.

12	M TERMINAL-L(9)	1	Copper Alloy	t=0.20
11	M TERMINAL-R(6)	1	Copper Alloy	t=0.20
10	B TERMINAL-L(7)	1	Brass	t=0.40
9	B TERMINAL-R(4)	1	Brass	t=0.40
8	SEPARATOR	2	High Temperature Thermoplastic UL 94V-0	
7	T TERMINAL-L(8)	1	Copper Alloy	t=0.35
6	T TERMINAL-R(5)	1	Copper Alloy	t=0.35
5	RING TERMINAL(3)	1	Copper Alloy	t=0.30
4	TIP SPRING(2)	1	Copper Alloy	t=0.30
3	EARTH SPRING(1)	1	Copper Alloy	t=0.30
2	COVER	1	POM	UL 94HB
1	HOUSING	1	PBT+GF	UL 94V-0

Please refer color and plating combination list.

LTR	PART NO.	QTY	MATERIAL	REMARK
120~315	±0.5	DWN	汪鑫	NAME PHONE JACK
30~120	±0.35	DSND	王瑞榮	CAT. NO. HTJ-064-16B
6~30	±0.22	CHKD	張啓濤	
BELOW 6	±0.16	APVD	郭素玲	
DIMENSION	TOLERANCE	KUNMING ELECTRONICS CO.,LTD.		DWN.NO. A-06416B
				1/1
				A

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.30 ANGLES: ±5°